


**118SA and 115SA  
feature identical connection  
and control panels.**

Flat / X-over recessed button.  
 • up = 'flat' (full bandwidth output signal).  
 • pushed = 'x-over'.

2 unbalanced XLR male sockets for the STEREO output.

2 balanced XLR male sockets for the 'link' outputs allowing parallel connection of more 118SA or other self-powered systems.

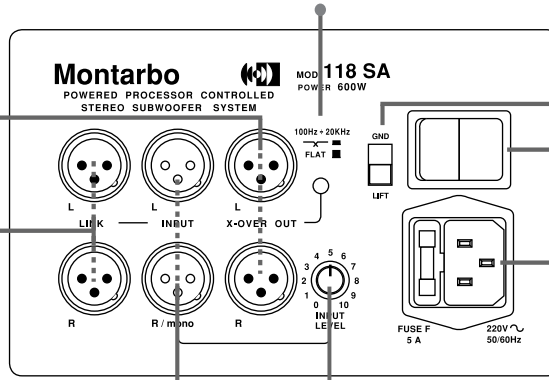

2 balanced XLR female sockets for the STEREO input.

Input level control. Allows to adapt the input sensitivity of the built-in power amplifier to the output level of the mixer.

