


MTB/S425 Cable | MONTARBO | Technical Specifications

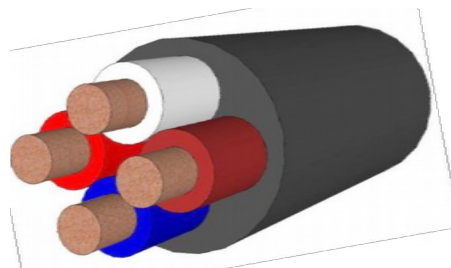

FEATURES

- High-purity oxygen-free copper (OFC)
- High flexibility
- High mechanical resistance
- Low electrical resistance

MTB/S22 - TECHNICAL SPECIFICATIONS

Resistance 20° (ohm/km):	IEC/228 HD 383 S2 CEI (20-29) compliant
Flame resistance:	IEC 332-1 CEI (20-35) compliant
Test Voltage (KV)	2
Temperature range (°C):	-15° to +60°

AVAILABLE OPTIONS

DESCRIPTION	LENGTHS MT	CODE	CODE NUMBER
SPEAKON-SPEAKON Neutrik	0.5 mt	MTB/S425-0,5	F0500019
SPEAKON-SPEAKON Neutrik	5 mt	MTB/S425-5	F0500020
SPEAKON-SPEAKON Neutrik	10 mt	MTB/S425-10	F0500021
SPEAKON-SPEAKON Neutrik	20 mt	MTB/S425-20	F0500022
Cable Reel	100 mt	MTB/S425 4X2,5	F0600002

DESCRIPTION

The MTB/S425 is a Montarbo speaker cable totally made in Italy with very high technical characteristics, consisting of 4 PVC insulated conductors, with 4 X 2.5 mm² wire-gauge (0.245mm maximum section micro strand braid in red Copper OFC). The excellent electrical characteristics in addition to the Neutrik Speakon connectors and a state-of-the-art assembly, make this Montarbo cable the perfect solution in a live situation where quality and reliability are essential.

APPLICATIONS

- Speaker cable
- Fixed installations

MTB/S22 - PHYSICAL SPECIFICATIONS

Wiregauge:	4X2,5 mm ²
Conductor:	Red CU OFC
Conductor type:	48 X 0,245 mm micro strand
Electrical insulation:	PVC
Core:	3.45 mm
Outer Sheath:	PVC
Diameter (mm)	11
Weight (Kg/Km)	200

